

G™ LUBRICANT - WHAT IS IT?

G™ LUBRICANT is a concentrate of GMG Graphene and lubricating oil (1%) that is designed for **ENERGY AND EMISSION SAVINGS** and **wear prevention**. It is then further diluted to a recommended concentration of 0.01% in a fully formulated lubricant.

The concentrate can be added to an existing fully formulated lubricant or can be tailored by Graphene Manufacturing Group as an addition to the clients' choice of fluid.

G™ LUBRICANT's rich black colour evokes revolutionary, premium, power, elegance, protection, sophisticated, certainty, serious and dramatic performance enhancement elements for marketing creativity at nanotechnology level.


G™ LUBRICANT PERFORMANCE & SUPERIORITY

G™ LUBRICANT protects the friction surfaces and reduces the friction coefficient by forming a protective layer between metal interfaces.

Due to GMG's unique proprietary graphene manufacturing process GMG Graphene's purity, platelet size, number of layers and structure are dispersible within formulated lubricants and base oils. It has performance and functionality superior to other graphene's and friction modifiers.

G™ LUBRICANT will not block filters, degrade, coagulate, or lower existing lubricants performance.

G™ LUBRICANT is powered by GMG Graphene's high tensile strength, chemical stability, high melting point, and its low shear resistance enhancements.

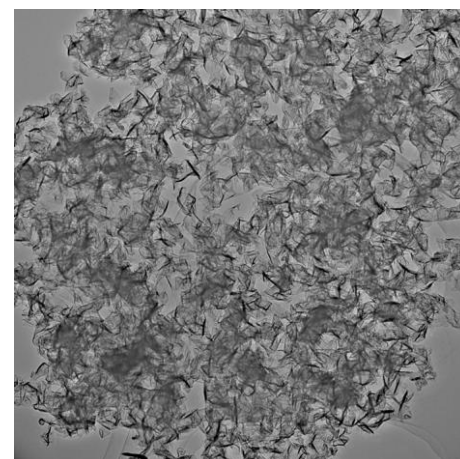

GMG Graphene.
Magnification enables visibility of 1.0 nm

FEATURES

- **Anti – Wear**
- **Friction Modifier**
- **Oxidation Inhibitor**
- **Tribochemical Action**
- **Thermal Conductivity**
- **Anti – Rust Properties**
- **Temperature Resistance**


BENEFITS

- **ENERGY SAVINGS**
- **EMISSION SAVINGS**
- **Asset Longevity**
- **Friction Reduction**
- **Lower Maintenance**
- **Increased Heat Dissipation**
- **Lower Operating Temperature**

GMG's MODIFIED ASTM TESTING CAPABILITIES

GMG has the capability to undertake modified ASTM Lubricant testing in GMG's laboratory and technical facilities. GMG utilises its own Stanhope Seta 4 Ball Wear Test Machine to assess enhanced lubricant performance against base line lubricant.

G™ LUBRICANT in a client's fluid can be tested by GMG to the following *modified* ASTM tests:


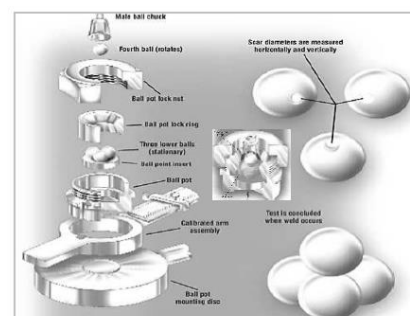


- ASTM D2783 Extreme Pressure Test for Lubricating fluids
- ASTM D4172 Wear Preventative Test for Lubricating fluids
- Coefficient of Friction Differential

GMG's MODIFIED ASTM TESTING CAPABILITIES

Extreme Pressure Test results have experienced reductions of wear up to 20% ▼.

Wear Preventative Test results have experienced reductions of wear enhancements up to 10% ▼.

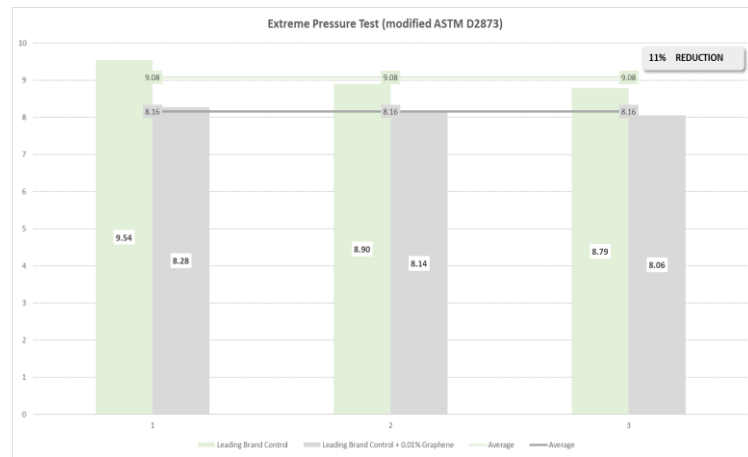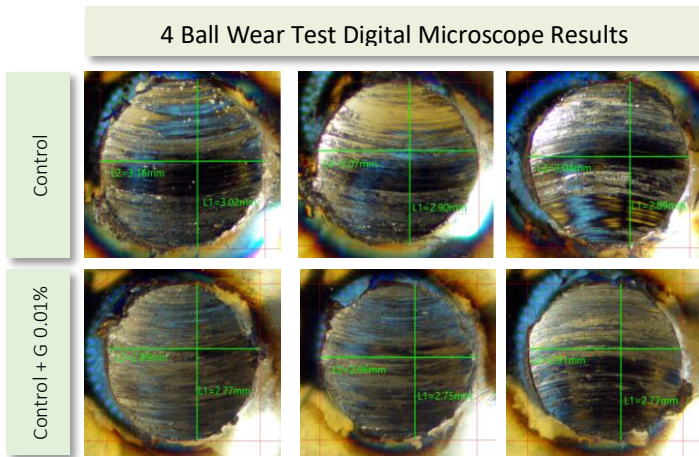


*Leading lubricant brand GMG inhouse modified ASTM test result. 0.01% of GMG graphene.

COEFFICIENT OF FRICTION & FUEL SAVINGS

Coefficient of Friction reduction up to 30% ▼.
Energy Savings test results up to 12% ▼.

*Lubricant manufacturer testing.

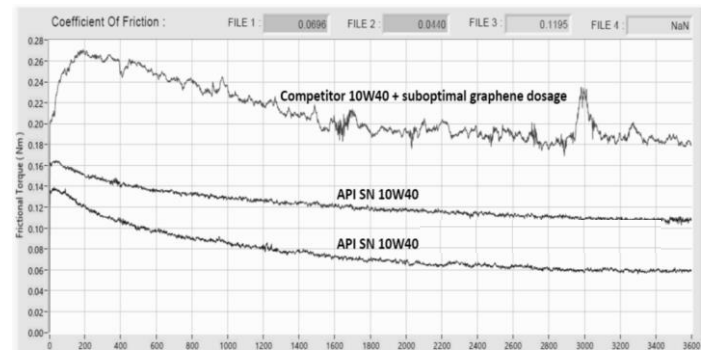

GTM LUBRICANT TYPICAL PROPERTIES


Silicon Contamination	Not detected in GMG graphene
Acidic Residue	Not detected in GMG graphene
Ash Contamination	Not detected in GMG graphene
Graphene Oxide	Not detected in GMG graphene
Colour	Translucent Rich Dark Black
Dispersion Base Concentration	As per client specification or Lubricating Oil 1 :100 (0.01%) or as client specification

TRIBOCHEMICAL ACTION

Graphene has demonstrated Tribochemical Action – the Graphene is deposited into damaged metal interface pits as a “corrective action”.^[1]

- A. Graphene deposited into the pitted piston oil ring surface after 100 operational hours.
- B. Graphene sliding through the scar tracks.
- C. Graphene deposited in valleys of steel ball surface.
- D. Folded, twisted, adhered and exfoliated Graphene on wear track.
- E. Partially exfoliated Graphene sheets deposited in the wear tracks.
- F. Energy-dispersive X-ray graph - C (Carbon peak) corresponding to figure C.

[1] A.K. Rasheed et al, 2016, Tribology International, Volume 103, pages 504-515.

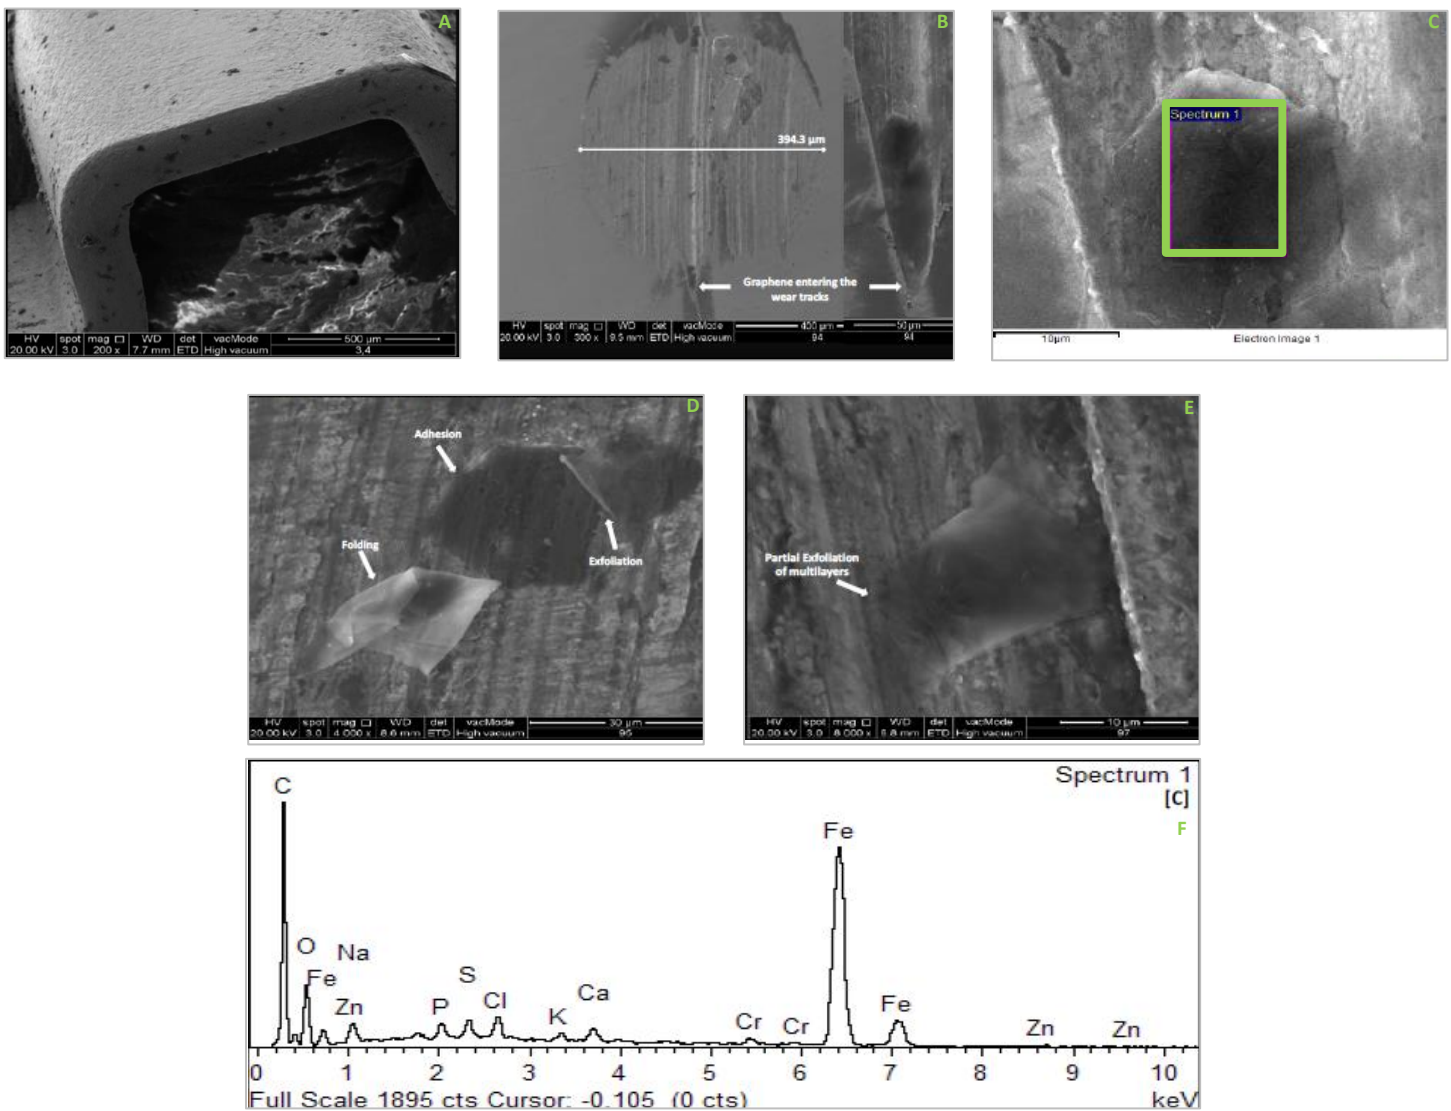

WARRANTY & DISCLAIMER

G™ LUBRICANT Technical Product Bulletin is a proposal contains general information. Information and should not be used as a substitute for client's own quality assurance, control, substantiation and/or testing protocols to ensure that GMG products are safe, effective and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any intellectual property rights of a third party. The information contained herein is offered in good faith and is believed to be accurate at the time of printing.

The statements and graphical representations made with respect to data described in or associated with this proposal are indicative only, are made only as at the date of this proposal, and are not guaranteed. The actual savings and other elements (including performance standards) detailed depend on several factors, including the operating conditions of the customer equipment to which the product is being applied (which are subject to variability and uncertainty). As a result, the specified product may perform differently to how it is described. While care has been taken to provide accurate figures, to the extent permitted by law we provide no warranty and make no representation as to the performance of the specified product and we accept no liability for a failure to perform at the standards described. Reliance should not be placed on the information or opinion contained in this proposal, and you should conduct your own independent investigations to determine whether the specified product is suitable for your business.

SAFETY DATA SHEET

Contact your GMG representative for the Safety Data Sheet.

COPYRIGHT

© Copyright Graphene Manufacturing Group Ltd. All rights reserved. All content remains the property of Graphene Manufacturing Group Pty Ltd. All other trademarks mentioned are trademarks or registered trademarks of their respective owners. All text, images, graphics and PDF files are subject to the copyrights and intellectual property rights of Graphene Manufacturing Group Ltd. Separate to the purpose of review and private use, this information cannot be used without written permission from Graphene Manufacturing Group Ltd. Information contained herein is for general information only and should not be used as an infallible to a product's specification and or performance.